

## ELITE B 70

Drills sharpening machine from  $\varnothing 3$  to  $\varnothing 70$  mm.  
2, 3 or 4 cuts to the right and left.  
Sharp and precise sharpening of drills.

The machine incorporates a practical magnifying glass to check the wear of the drill and the result of the sharpening without having to disassemble the bit of the machine.




The Elite model B-70 allows fast and precise sharpening of the drills.


The machine is fitted as standard with a practical magnifying glass to check the wear of the drill and the grinding result without having to remove the drill from the machine.

The sharpening load is regulated with the front vernier to obtain an even and precise load.

It is quick and easy to use, with patented drill clamping system that guarantees the highest quality of sharpening of all types of drills, including special drills, bi-drill, bits, self-centering drills, milling cutters, reamers, countersinks and more.

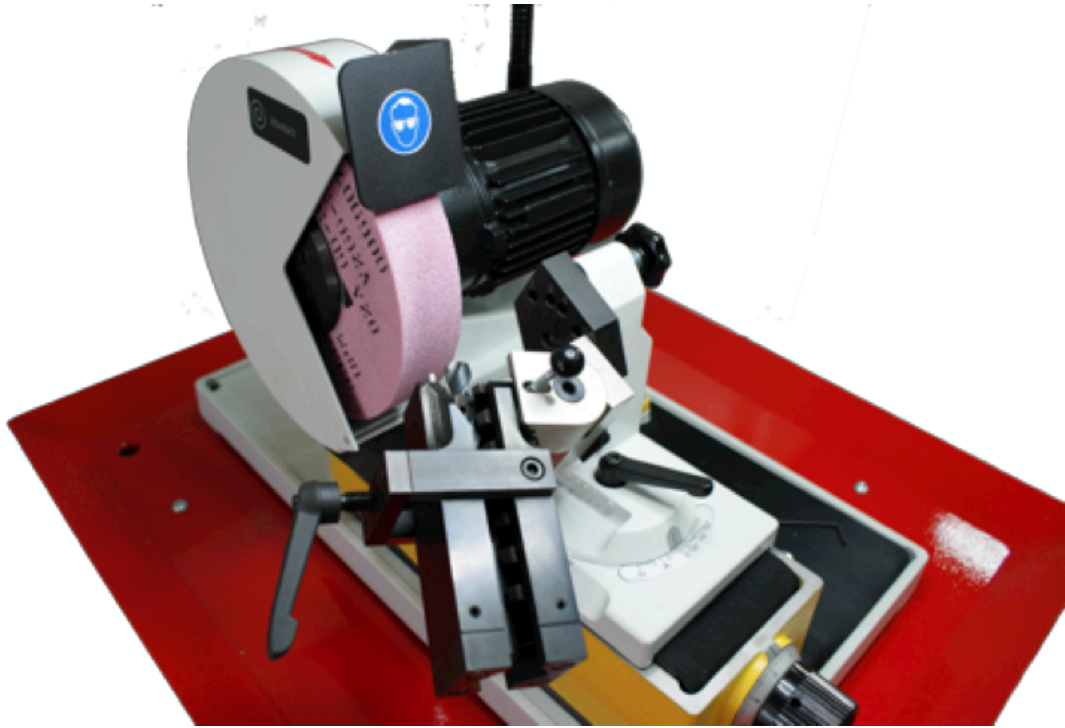


Top view

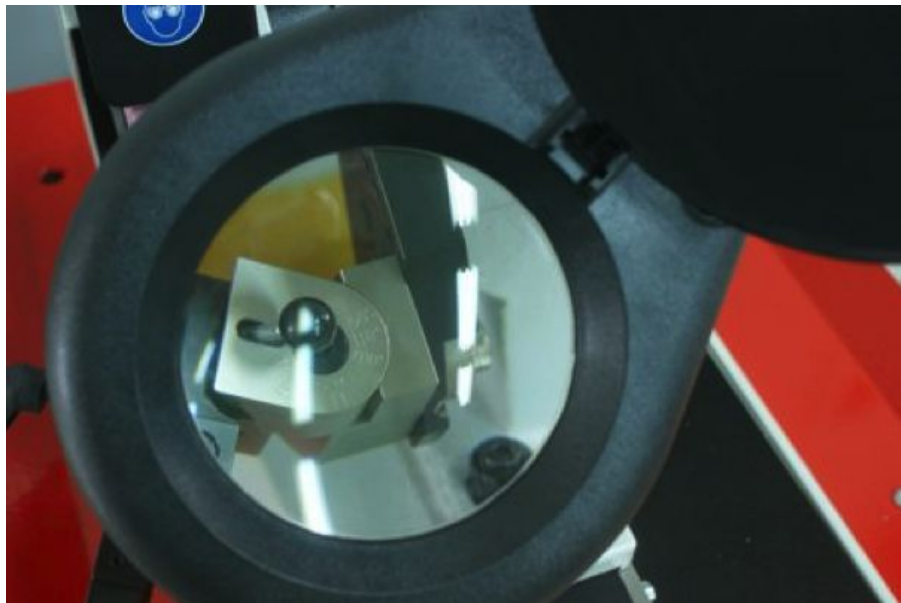

Magnifying glass and adjustment magnifier for precision work

---

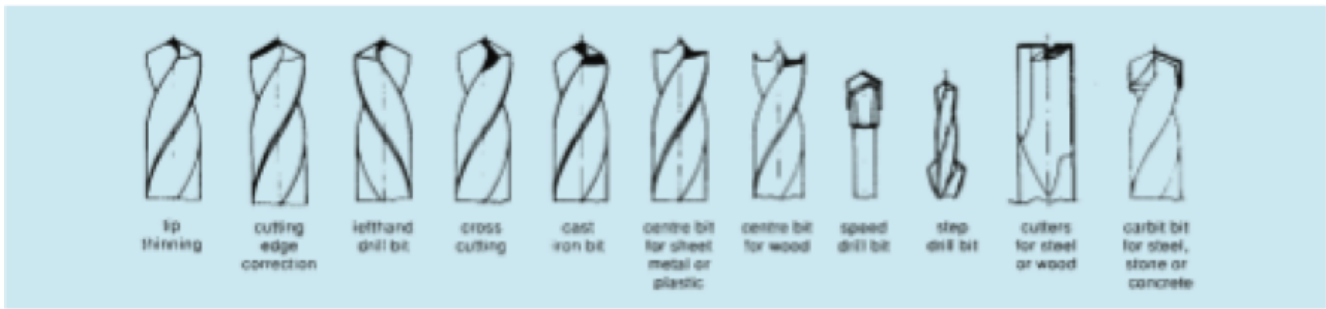

## Types of drills it can be sharpened

### Optional accessories

- Drills holder from  $\varnothing 40$  to 60 mm.
  - Drills holder from  $\varnothing 50$  to 70 mm.
  - 3 cuts adaptor
  - Morse taper 1/2/3 short drills holder
  - Countersink adaptor from  $60^\circ$  to  $90^\circ$
  - Machine basement
  - Diamond grinding wheel
  - CBN Grinding wheel
-

# SPECIFICATIONS

## Technical data

<b>Sharpening capacity</b>	from $\varnothing 3$ to $\varnothing 70$ mm. (0,12" to 2,75")
<b>Type of drills</b>	2-3 and 4-blade drills for wood or steel, right and left
<b>Connection voltage</b>	220/400 V. 3Ph

## Available versions

<b>Model</b>	<b>Size</b>	<b>Weight</b>
B 70	570 x 330 x 320 mm	57 Kg

### HIGHLIGHTS

- Front adjustment of the grinding load with precision grinder
- Lateral adjustment for the centering of the edge of the bit with respect to the grinding wheel
- Built-in magnifying glass to check the required sharpening load with respect to the wear of the bit, and the final result of the sharpening without the need to disassemble the bit
- For drills with left or right cut
- Diameter of the drill bits:  $\varnothing 3$  to  $\varnothing 70$  mm (standard up to 40 mm.)
- Corundum grinding wheel of  $\varnothing 125 \times 20 \times 20$  mm.

We reserve the right to make design changes in the interest of technical progress.

---